


产品参数 / PRODUCT PARAMETERS

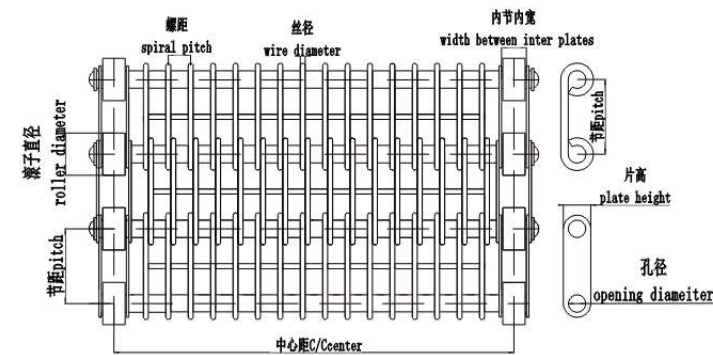

材质 Material	304 不锈钢, 316 不锈钢 SUS304, SUS316
链条节距 (毫米) Pitch(mm)	25.4, 31.75, 38.1, 50.8, 63.5, 76.2
支轴直径 (毫米) Rod diameter(mm)	5, 6, 7, 8, 10, 12
丝径 (毫米) Wire diameter(mm)	1.2, 1.5, 1.6, 1.8, 2, 2.5, 3
螺距 (毫米) Spiral pitch	2.4 - 100
节距 (毫米) Rod pitch(mm)	25.4, 31.75, 38.1, 50.8, 63.5, 76.2
网宽 (毫米) Belt width(mm)	200- 6000
网带边缘 Edge finish	焊接 Welded
网带长度 Belt Length	定制 Customized
运行齿轮 Sprocket	材料和规格依据需求订制 Material & sprocket special is customized as per request

特殊规格可定制 / Special specifications are available

网带特点 / FEATURE

- 开孔率大, 通风性和脱水性能佳
 - 齿轮驱动, 网带运行平稳
 - 网带网面平整, 可用于不稳定物品的运输, 能承受较高的载荷和抗拉强度
 - 网带的工作温度范围96°C to 600°C
 - 易于清洗、组装和拆卸, 网带寿命长
- Large opening area, good air circulation and dehydration performance
 - Driven by sprocket to ensure the stable running and accurate tracking
 - Belt surface and can be used for the transportation of unstable products. It can bear higher load and tensile strength
 - Belt working temperature range of -96°C to 600°C
 - Easy clean, assemble and maintenance, solid belts with a long life

应用 / APPLICATION



烘干
Dry




降温
Cooling



清洗
Washing



速冻
Freezing



醒发
Proofing

Eye Link Belt 眼镜网

眼镜网使用进口自动化螺线成型机生产加工, 网丝做成眼镜形状, 使用支轴串起来做成的网带, 眼镜网线圈采用高抗拉线材生产, 强度高, 耐磨性好。网带边缘可以使用链片焊接或者组装链条。眼镜网设计可以在网带边缘加侧挡板和网面中间加装横挡板。

Eye link belt is made by imported CNC digital mesh weaving machine. Wire is formed into Eye-link shape and join with rod. With high tensile strength of wire ring enhance mesh belt is more durable. Belt edge finish can assembly with reinforcing plate links or chain. Eye link belt design can add side and center flight to prevent the products from falling down to the ground.



产品细节 / Product Image

