



Eye Link Belt

Eye link belt is made by imported CNC digital mesh weaving machine. Wire is formed into Eye-link shape and join with rod. With high tensile strength of wire ring enhance mesh belt is more durable. Belt edge finish can assembly with reinforcing plate links or chain. Eye link belt design can add side and center flight to prevent the products from falling down to the ground.

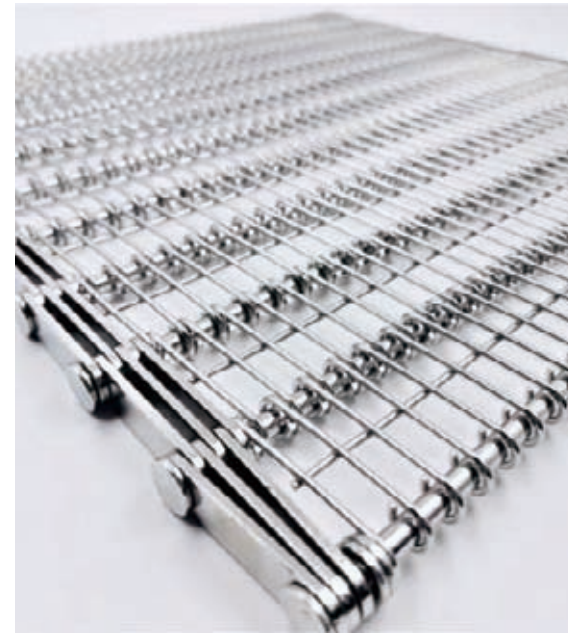


PRODUCT PARAMETERS

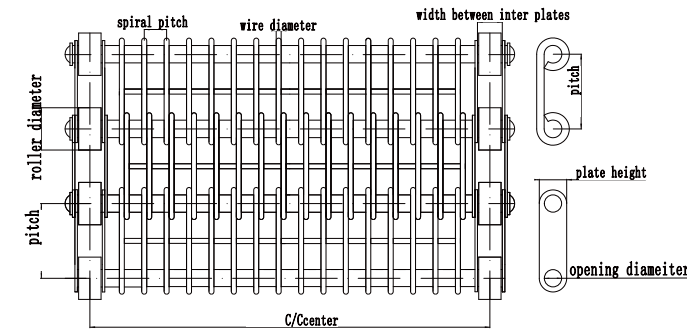

Material	SUS304, SUS316
Pitch(mm)	25.4, 31.75, 38.1, 50.8, 63.5, 76.2
Rod diameter(mm)	5, 6, 7, 8, 10, 12
Wire diameter(mm)	1.2, 1.5, 1.6, 1.8, 2, 2.5, 3
Spiral pitch	2.4 - 100
Rod pitch(mm)	25.4, 31.75, 38.1, 50.8, 63.5, 76.2
Belt width(mm)	200-6000
Edge finish	Welded
Belt Length	Customized
Sprocket	Material & sprocket special is customized as per request

Special specifications are available

PRODUCT IMAGE

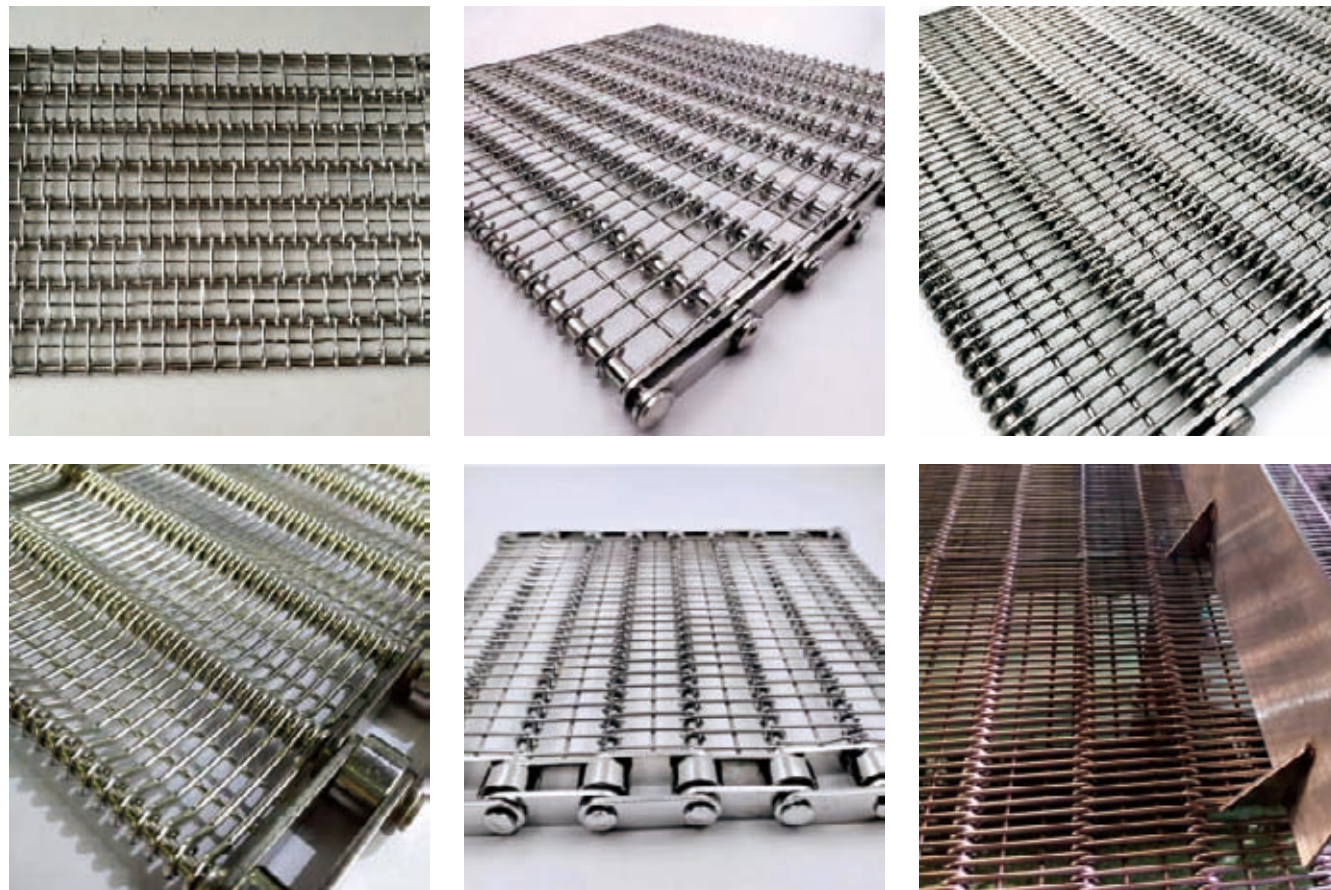


FEATURE

- Large opening area, good air circulation and dehydration performance
- Driven by sprocket to ensure the stable running and accurate tracking
- Belt surface and can be used for the transportation of unstable products. It can bear higher load and tensile strength
- Belt working temperature range of -96°C to 600°C
- Easy clean, assemble and maintenance, solid belts with a long life

APPLICATION



Dry



Cooling



Washing



Freezing



Proofing